


OPC- 617 & OPC-1939

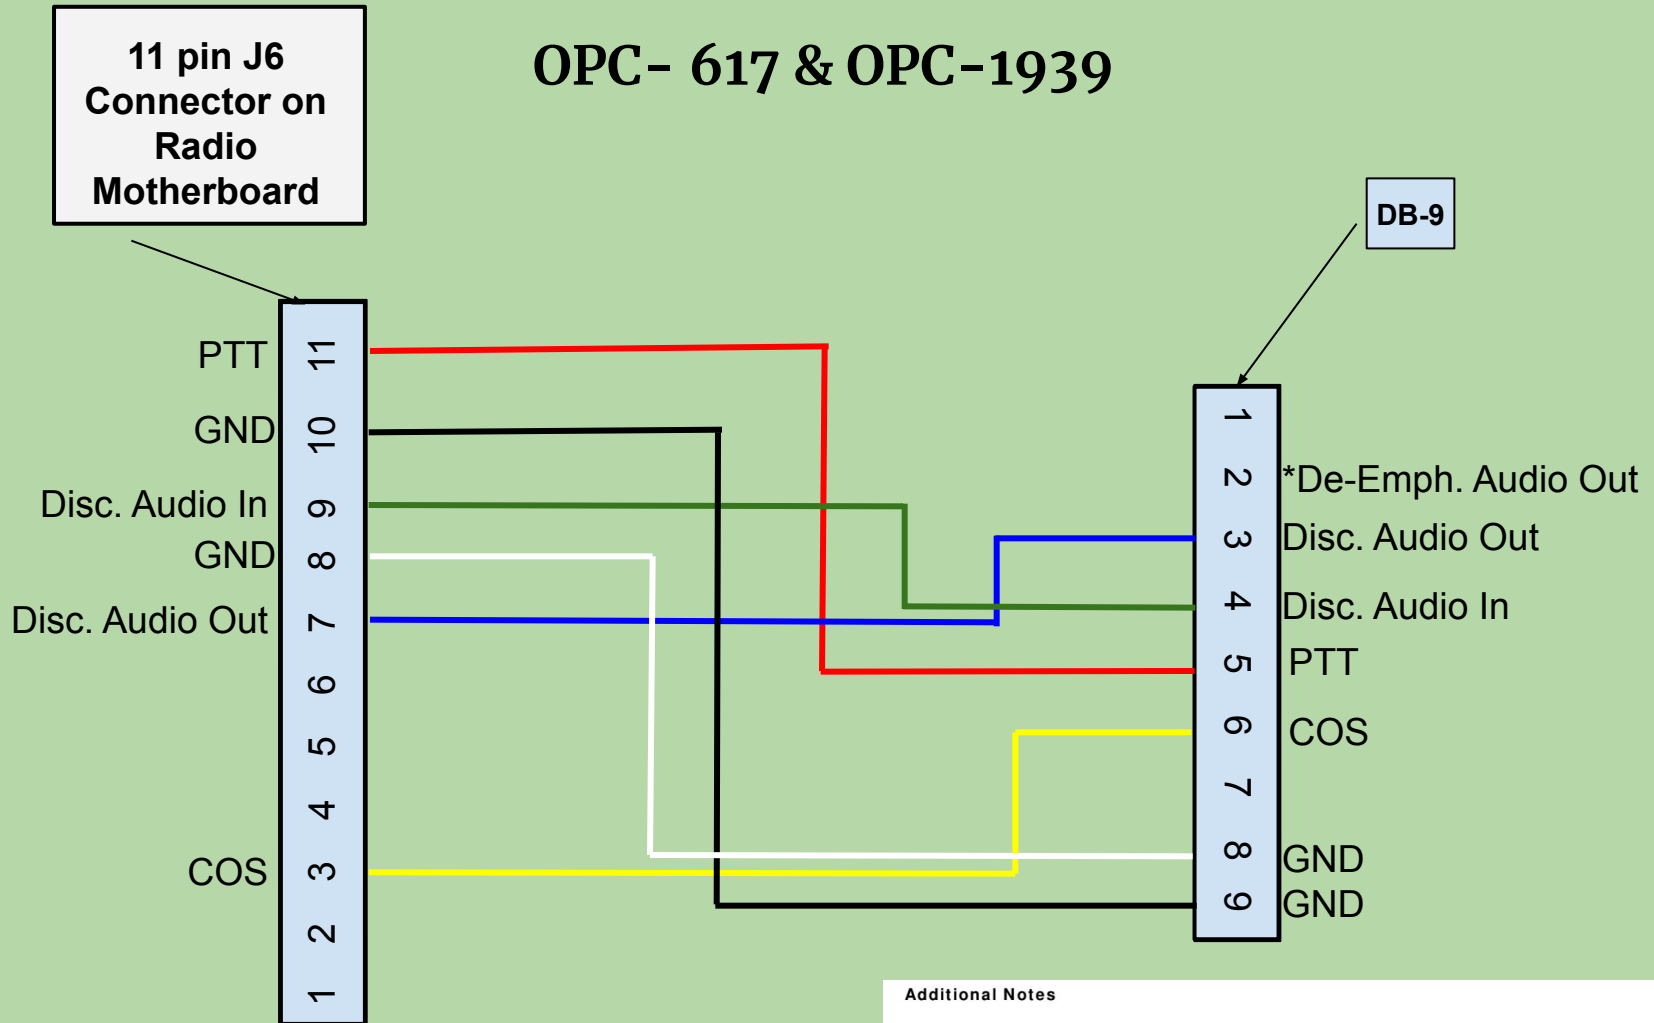

Additional Notes

DB-9 Connector Pins	Notes
Pin 2	To find a suitable AF level, turn the Vol Knob OFF Change the AF Min level (in Set Mode) until a suitable level is found.
Pin 4	Solder Bead F for data. Solder Bead D for AF in.
Pin 5	To enable an external PTT: In Common -> Expert , set EPTT/ FTSW to EPTT . If you require a delay after releasing PTT, set a value in the EPTT Delay Timer .
Pin 6	To set Pin 6 as a Carrier Operated Relay: Disable the 2/5-tone function for the selected channel. In Common -> Expert , set RX EXO to ON and the Delay Timer to OFF . This enables COR to react instantly to the signal when it switches on and off.